

# J.L. Fisher

Motion Picture &  
Television Equipment

# MODEL 11 CAMERA DOLLY

OUR MOST COMPACT HYDRAULIC LIFT DOLLY

The Model 11 is our smallest Dolly. Lightweight and compact, it is built with the same high quality standards found in all J.L. Fisher products. The Model 11 Dolly shares the same controls and characteristics of the Model 10 Dolly and has a complete line of its own accessories. It operates effortlessly on Square or Round Track, making the Model 11 and Model 10 an excellent two dolly combination.

200 LB (91kg) LIFT BEAM CAPACITY



*The Model 11 Dolly is engineered and manufactured to meet the demanding production needs of the motion picture, television and video industries. Compact size, three-way steering and a solid lift beam give operators a wide variety of options. The reliable, quiet, smooth and safe Model 11 requires minimal maintenance.*

# MAIN FEATURES





## STEERING MODES

**REAR (CONVENTIONAL):** Front wheels are locked, rear wheels can rotate 360°.

**CRAB:** Front and rear wheels can rotate in unison 360°.

**ROUND:** Front and rear wheels rotate independently with mechanical compensation to allow variable radius turns, even down to 0 radius.

**NARROW:** Front and rear wheels can rotate 180° in any steering mode, providing a narrower wheel track for working in tight spaces.

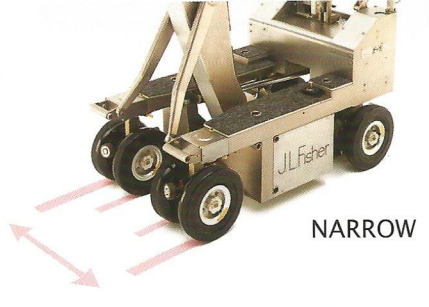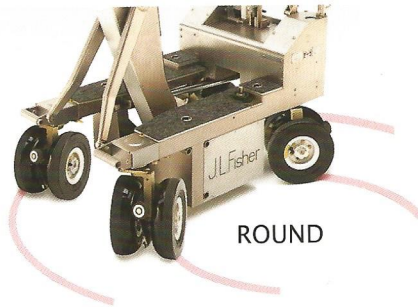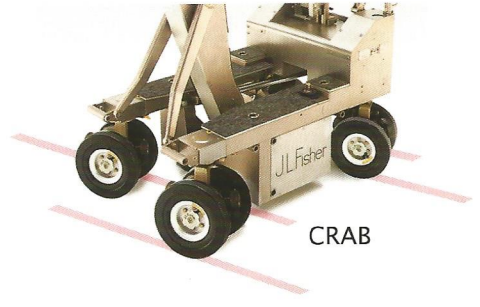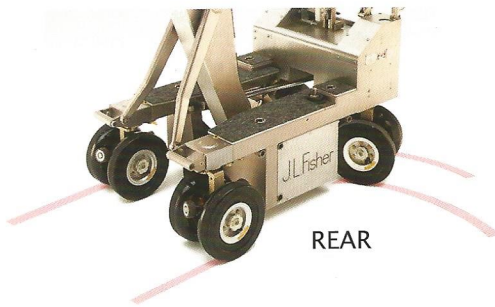


ACCEPTS 90 TO 240 VOLTS AC OR DC  
CHARGE THE HYDRAULIC LIFT SYSTEM  
IN AS LITTLE AS THREE MINUTES

REMOVABLE PUSH POSTS

UTILITY HOOKS

SINGLE LEVER  
POSITIVE LOCKING  
BRAKE SYSTEM

SELF-CONTAINED  
TRACK GUIDE SYSTEM

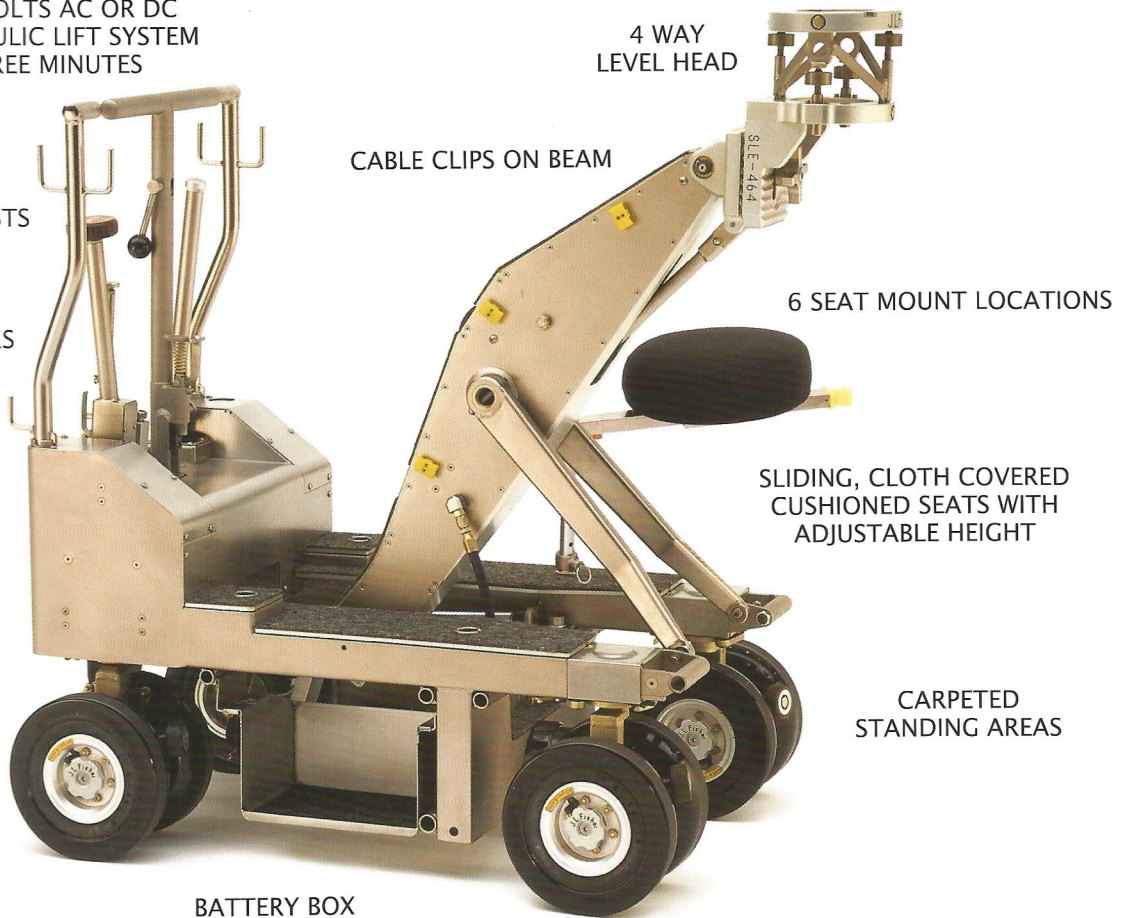

PUSH POSTS DOUBLE AS  
REAR CARRY HANDLES



POSITIVE LOCKING BRAKES







BUILT-IN TRACK GUIDES  
(Square Track Only)

# STANDARD RENTAL PACKAGE

The Standard Rental Package includes these items:

- 1 SLE 4-way Level Head
- 1 HS Hand Screw (for SLE)
- 1 ST Small Seat
- 1 S Large Seat
- 2 PP Push Posts
- 2 LE Low Side Boards
- 2 FE Front Boards
- 2 HE High Side Boards
- 2 CH Carry Handles
- 1 PC Power Cord
- 2 FPIN Front Pins
- 1 BPR Knee Bumper
- 2 AWR Allen Wrenches
- 8 TSW Pneumatic Tires
- 1 BRE Battery Box

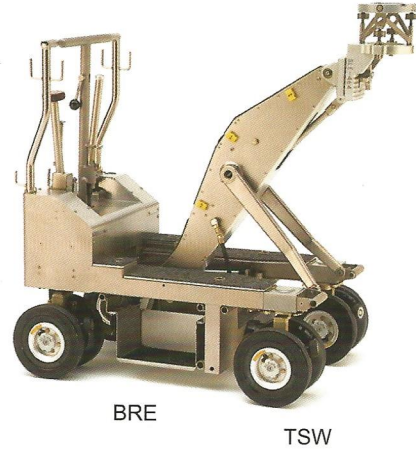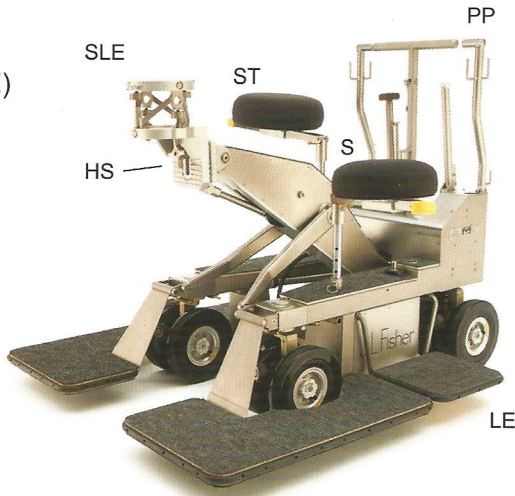

## OPTIONAL ACCESSORIES

\*Asterisk indicates items are included in the FULL RENTAL PACKAGE

### Dolly Boards & Platforms

- SPE\* Standing Platform
- DEL\* Diving Board, Left
- DER\* Diving Board, Right
- SFB Short Front Board
- SNFB Short Narrow Front Board
- EFB\* Front Board Bridge
- FPE Front Porch
- LFBE Low Front Board




SPE\*



DEL/DER\*



SFB




SNFB




FPE




LFBE



EFB\*

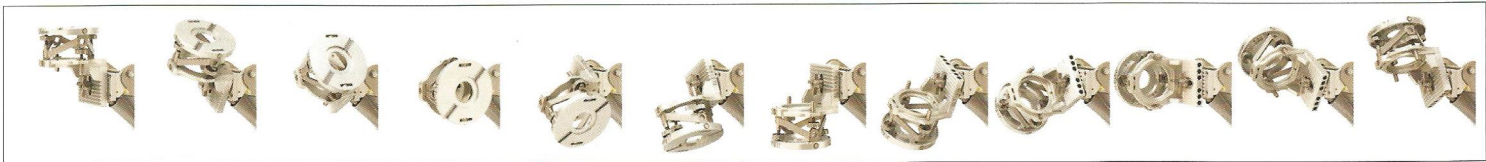

MITCHELL MOUNT LEVELING HEAD WITH 4 WAY ADJUSTMENT AND 360° ADJUSTABLE DIAMOND PLATE

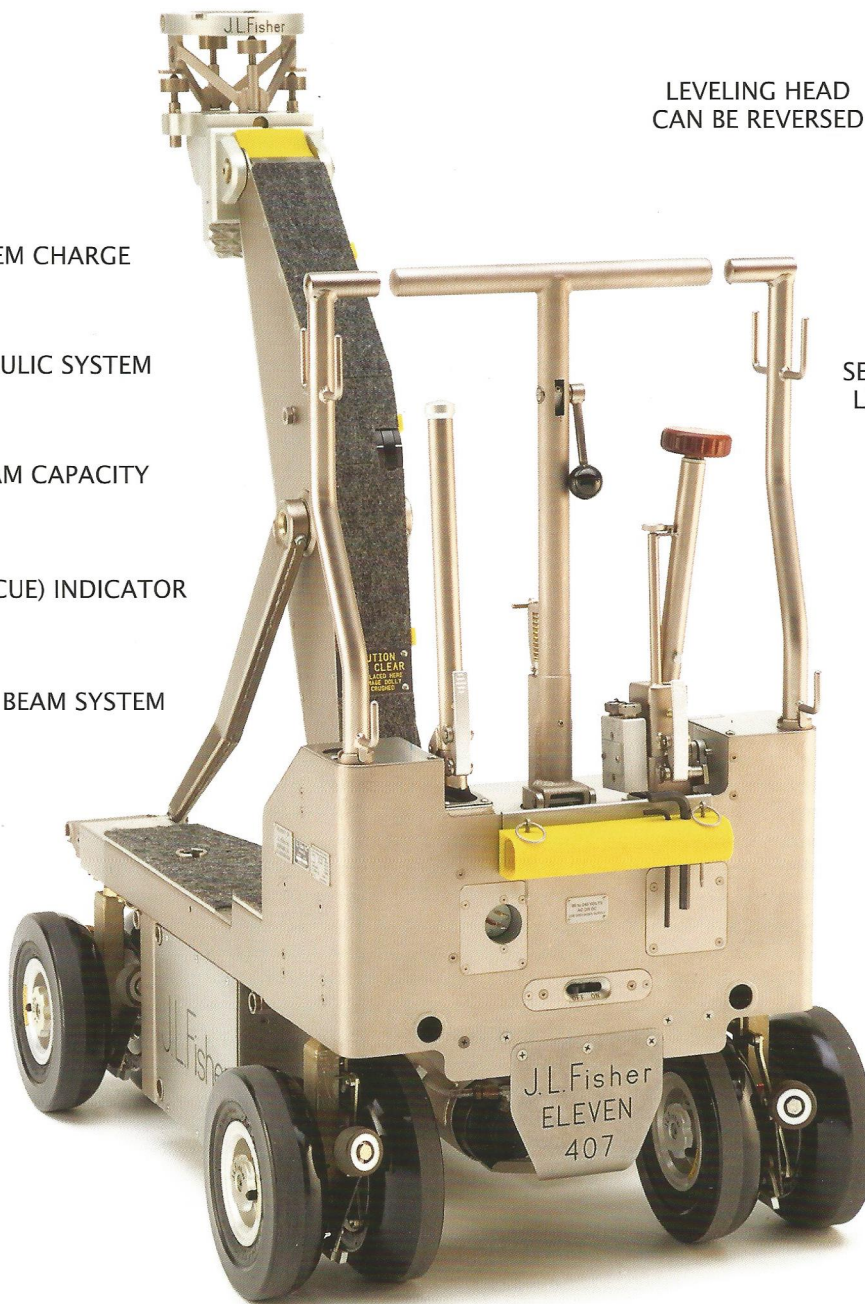

SEVEN LIFTS PER SYSTEM CHARGE


SELF-BLEEDING HYDRAULIC SYSTEM

200 lb (91kg) LIFT BEAM CAPACITY

LIFT BEAM POSITION (CUE) INDICATOR

SELF-DAMPENING LIFT BEAM SYSTEM

LEVELING HEAD CAN BE REVERSED



SELF CENTERING HYDRAULIC LIFT BEAM CONTROL KNOB WITH SAFETY LOCK



HYDRAULIC HAND PUMP FOR LOCATION WORK

PNEUMATIC TIRES


The Model 11 Dolly has a maximum load capacity of 900 lbs. (408 kg)



LIFT BEAM (CUE) INDICATOR



Power Requirements:  
90 TO 240 VOLTS AC OR DC



UTILITY TRAY (UTE)



FOLDING CONTROLS

## MORE OPTIONAL ACCESSORIES

\*Asterisk indicates items are included in the FULL RENTAL PACKAGE


### Risers

- R3 Camera Riser, 3" (7.6cm)
- R6\* Camera Riser, 6" (15.2cm)
- R12\* Camera Riser, 12" (30.5cm)
- R6BA Camera Riser w/ 75mm Ball Adapter, 6" (15.2cm)
- R6BB Camera Riser w/ 100mm Ball Adapter, 6" (15.2cm)
- R6BC Camera Riser w/ 150mm Ball Adapter, 6" (15.2cm)
- R12BA Camera Riser w/ 75mm Ball Adapter, 12" (30.5cm)
- R12BB Camera Riser w/ 100mm Ball Adapter, 12" (30.5cm)
- R12BC Camera Riser w/ 150mm Ball Adapter, 12" (30.5cm)
- RJ6 Heavy Duty Camera Riser, 6" (15.2cm)
- RJ12 Heavy Duty Camera Riser, 12" (30.5cm)
- RJ18 Heavy Duty Camera Riser, 18" (45.7cm)




### Angle Plate

- AP\* 90-Degree Camera Angle Plate

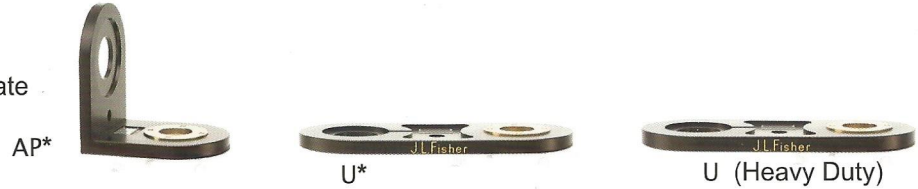

### Offsets

- U\* Camera Offset, 10" (25.4cm)
- TH\* Camera Offset, 24" (61cm)
- RO\* Rotating Offset
- ROB Rotating Offset w/ Ball Adapter, 150mm
- ROL Rotating Offset, Low
- ROHL Rotating Offset, High/Low
- ROX Rotating Offset, Long
- ROP Rotating Offset, Pivot

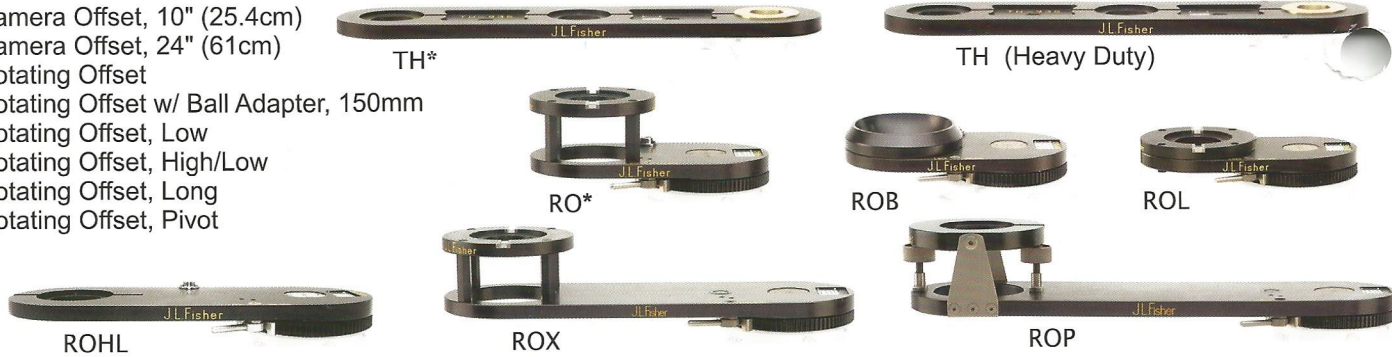

### Adapters

- 75A 75mm Ball Adapter
- 100A 100mm Ball Adapter
- 150A 150mm Ball Adapter
- UA Universal Adapter
- HBA Half-Ball Adapter
- MEA Mitchell Euro Adapter
- ESLE Euro Boss Adapter



### Low Level Head

- LHE\* 4-way Low Level Head
- LHA Low Head Adapter



### Seat & Seat Accessories


- RS Rotating Seat
- SOH\* Seat Offset High
- SOS Seat Offset Straight
- SSOS Seat Offset Short
- SR6\* Seat Riser Adjustable



## MORE OPTIONAL ACCESSORIES

### Crossarms

- CRA1 Crossarm, 11.5" (29cm) to 19" (48cm) Reach
- CRA2 Crossarm, 15" (38cm) to 24" (61cm) Reach
- CRA3 Crossarm, 18" (46cm) to 29" (74cm) Reach
- CRA4 Crossarm, 23" (58cm) to 36" (91cm) Reach
- CRA6 Crossarm, 31" (79cm) to 53" (135cm) Reach

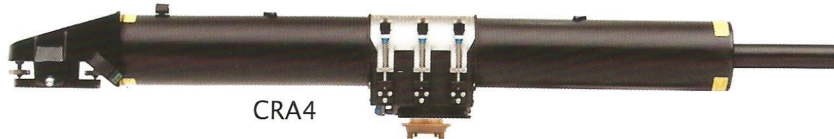

CRA4

\* Note: All Crossarms require the use of the Center Mount (CM) and RJ12 Heavy Duty Riser on the Model 11 Dolly

Please refer to the Crossarm Brochure or our web site, [www.jlfisher.com](http://www.jlfisher.com), for full specifications and options available

### Jib Arms

- JIB20\* Model 20 Jib Arm, 51.5" (131cm) Reach
- JIB21\* Model 21 Jib Arm, 68.5" (174cm) Reach
- JIB22\* Model 22 Jib Arm, 99.5" (253cm) Reach



JIB21

\* Note: Model 20, 21 and 22 Jib Arms require the use of the Center Mount (CM) and RJ12 Heavy Duty Riser on the Model 11 Dolly

Please refer to the Jib Arm Brochure or our web site, [www.jlfisher.com](http://www.jlfisher.com), for full specifications and options available

### Fluid Heads

- WS2 Weaver/Steadman Fluid Head, 2 Axis
- WS3 Weaver/Steadman Fluid Head, 3 Axis
- V Vector 700 Fluid Head, 2 Axis




WS2

WS3

V

### Other Accessories

- AC\* (pair) Accessory Carts (pair)
- BAZ Bazooka (Pneumatic or Sectional)
- CHE Short Carry Handles
- CM Center Mount with RJ12 Riser
- CB Cue Board
- HH High Hat
- LA Lamp Adapter
- MRD Monitor Rack
- MLA Mitchell Lamp Adapter, Junior 1 1/8 in. (MLA)
- PB Push Bar
- SCO Scooter Board
- UDJ Dolly Jack (uses Push Post for handle)
- UTE Utility Tray

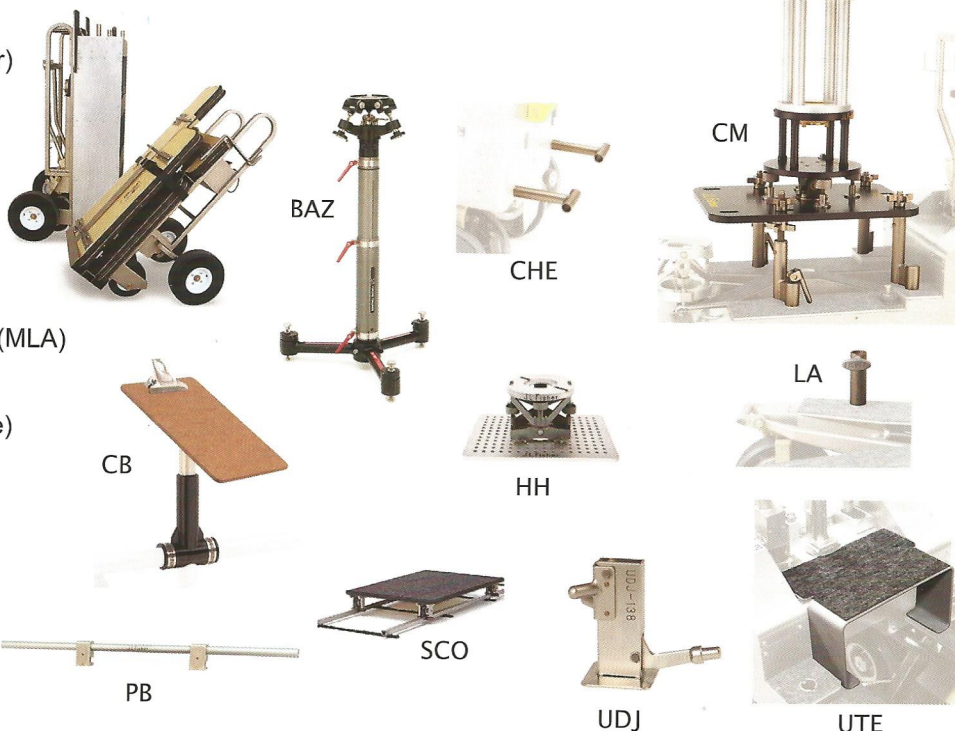

AC\* (pair)

BAZ

CHE

CM

LA

HH

MRD

MLA

CB

SCO


PB

UDJ

UTE

### Wheels & Ice Skates

- SHW Shaved Wheel
- SK Ice Skates
- TTW Round Track Wheels
- SCWT Soft Compound Wheels
- SWT Soft Wheels
- SBWS Skateboard Wheels
- DSBC Dexter Skateboard Wheels

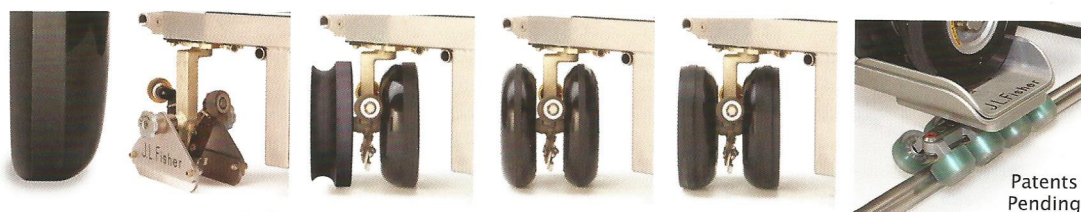

SHW

SKE

ETW

SCWE

SWE

SBWS / DSBC

Patents Pending


All J.L. Fisher track is on 24.5" (62cm) center

**Track & Track Accessories**



- TR2 Round Straight Track, 2' (.61m)
- TR3 Round Straight Track, 3' (.91m)
- TR4 Round Straight Track, 4' (1.2m)
- TR6 Round Straight Track, 6' (1.8m)
- TR Round Straight Track, 8' (2.4m)
- TR10 Round Straight Track, 10' (3m)
- CR10 Round Curved Track, 10' (3m) Dia.
- CR15 Round Curved Track, 15' (4.6m) Dia.
- CR Round Curved Track, 20' (6.1m) Dia.
- CR25 Round Curved Track, 25' (7.6m) Dia.
- CR30 Round Curved Track, 30' (9.1m) Dia.
- CR50 Round Curved Track, 50' (15.2m) Dia.
- CR70 Round Curved Track, 70' (21.3m) Dia.
- RMPR Track Ramp For Round Track
- WED Track Wedges
- TB Track Buckle




○ Round Tube Track  
1.5" (3.8cm) Diameter

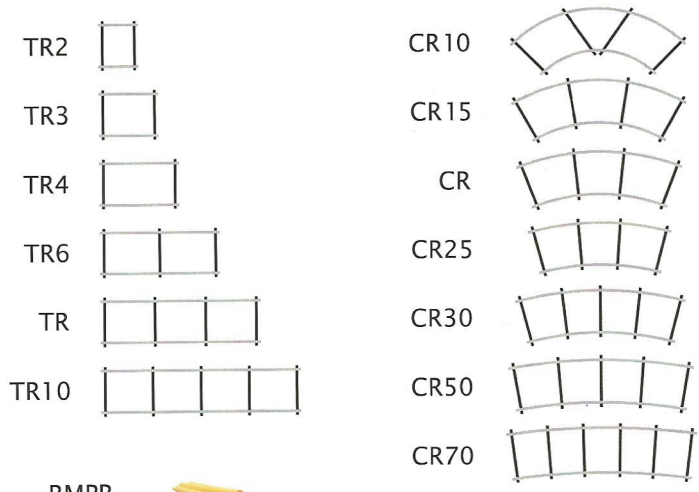


Square tube dolly track, not shown here, is available in similar sizes and diameters as the round tube track. Please call J.L. Fisher for availability.

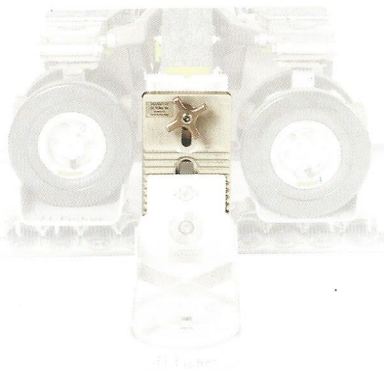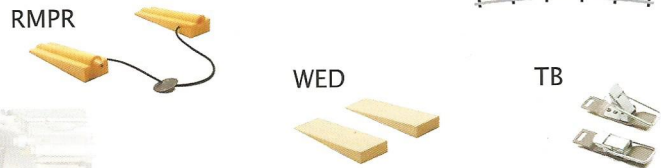


LOW HEAD ADAPTER (LHA)

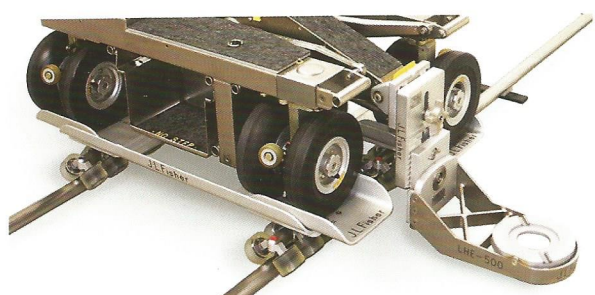

NEW SKATEBOARD WHEELS (SBWS) (Patents Pending) come with extensions to allow the Model 11 Dolly to be mounted sideways on the wheel frame. Shown here with the extensions in place, the LOW HEAD ADAPTER (LHA) and the LOW LEVEL HEAD (LHE) on Round Straight Track (TR10)

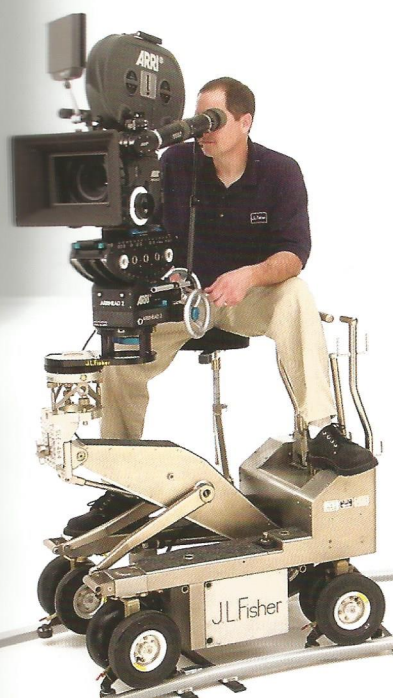

Model 11 Dolly shown using Built-in Track Guides with Rotating Offset (RO), Rotating Seat (RS), Seat Offset High (SOH) on Square Curved Track (CS2)

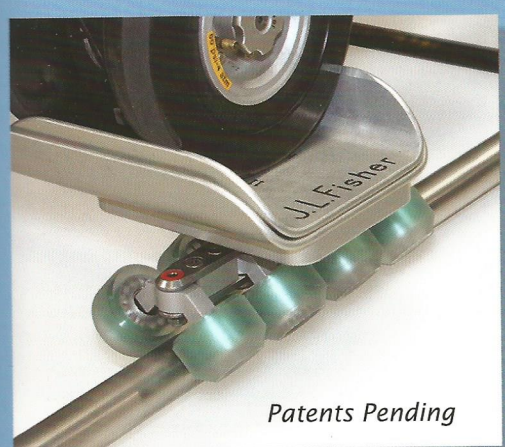

Patents Pending

SKATEBOARD WHEELS (SBWS)




TRACK WHEELS (ETW) ON ROUND STRAIGHT TRACK (TR)




BUILT-IN TRACK GUIDES ON SQUARE TRACK

Maximum Lift Beam Elevation	51.25 in. (130 cm)
Minimum Elevation (standard head)	13.875 in. (35 cm)
Minimum Elevation (low level head)	3 in. (8 cm)
Vertical Beam Travel	33.375 in. (85 cm)
Lift Beam Capacity	200 pounds (90.72 kg)
Lifts per System Charge	7
Length	40 in. (102 cm)
Width (wheels in)	20.5 in. (52 cm)
Width (wheels out)	25.625 in. (68 cm)
Height (operating)	39.75 in. (101 cm)
Height (folded)	23.5 in. (60 cm)
Height (center mount, before riser)	36.75 in. (93 cm)
Minimum Turn Radius (round steering)	16.188 in. (41 cm)
Minimum Turn Radius (conventional steering)	33.5 in. (85 cm)
Maximum Dolly Load Capacity	900 pounds (408.23 kg)
Battery Box (BRE) inside dimensions	10 in. (25.4 cm) W x 7 in. (17.8 cm) H x 6.75 in. (17.1 cm) D
Carrying Weight	307 pounds (139.25 kg)
Crated Size	59 in. (150 cm) L x 31 in. (79 cm) W x 34 in. (86 cm) H
Crated Weight	775 pounds (351.5 kg) (standard package)

DIMENSIONS

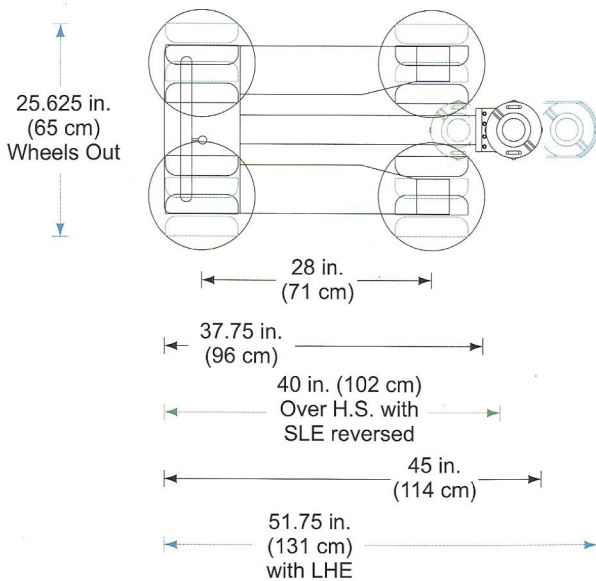

*Note: Due to variables such as adjustments and choice of risers, wheels, etc., these dimensions are approximate.*


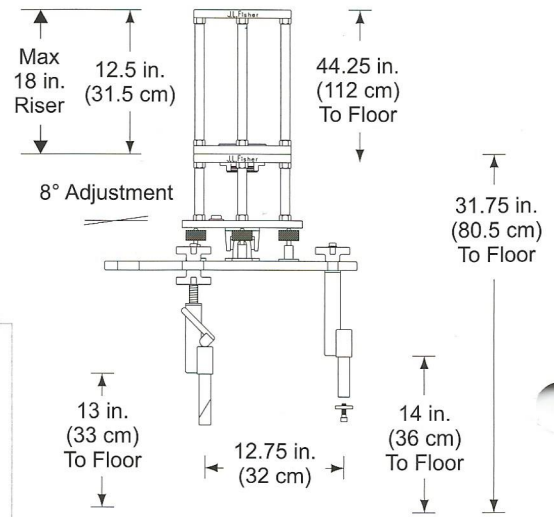


CENTER MOUNT (CM)

The Center Mount (CM), supports jib arms, lightweight camera booms and counterbalanced camera cranes. The Center Mount has thumbscrews for four-way leveling adjustment and a leveling indicator. Easily installed, the Center Mount has a standard Mitchell mount and comes with a heavy duty 12-inch Riser (RJ12).

The maximum gross load capacity of the Model 11 Dolly is 900 pounds (408 kg). Center Mount is not for supporting personnel or personnel carrying cranes.

MODEL 11 DOLLY

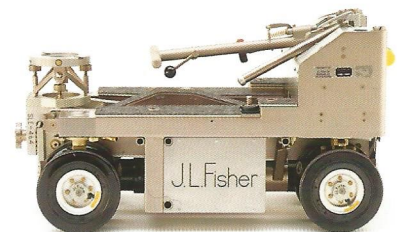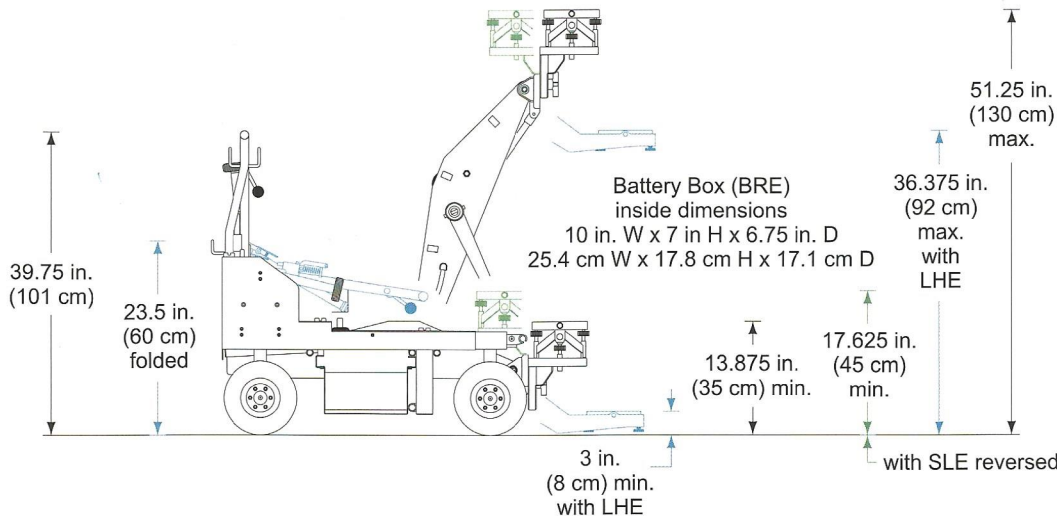

FOLDING CONTROLS

J.L. FISHER PRODUCTS ARE PROUDLY MADE IN BURBANK, CALIFORNIA U.S.A.

J.L. Fisher, Inc. Motion Picture & Television Equipment  
1000 W. Isabel Street, Burbank, CA 91506 U.S.A.  
Tel: (818) 846-8366 / Fax: (818) 846-8699  
Web: www.jlfisher.com e-mail: info@jlfisher.com

J.L. Fisher, GmbH Emil-Hoffmann-Str. 55-59 50996 Köln, German  
Tel: +49 2236 3922 0 Fax: +49 2236 3922 12  
Web: www.jlfisher.de e-mail: info@jlfisher.de