

J.L.Fisher

Motion Picture &
Television Equipment


MODEL 10 CAMERA DOLLY

RECOGNIZED AS THE INDUSTRY STANDARD HYDRAULIC LIFT DOLLY

Our most popular hydraulic lift beam camera dolly. It is smooth, quiet and easy to use, with a reputation for being well-made and low maintenance. Manufactured from the highest quality materials and components to meet the demanding needs of the entertainment industry, this stable, reliable Dolly offers operators a wide variety of accessories. The versatile Model 10 Dolly also incorporates many features and options suggested by our customers.

500 LB (227kg) LIFT BEAM CAPACITY

Over the years, J.L. Fisher has pioneered many innovative features that have become standard on the Model 10, and copied by others. Mechanically compensated Round Steering Mode was introduced on the Model 10 over twenty-five years ago.

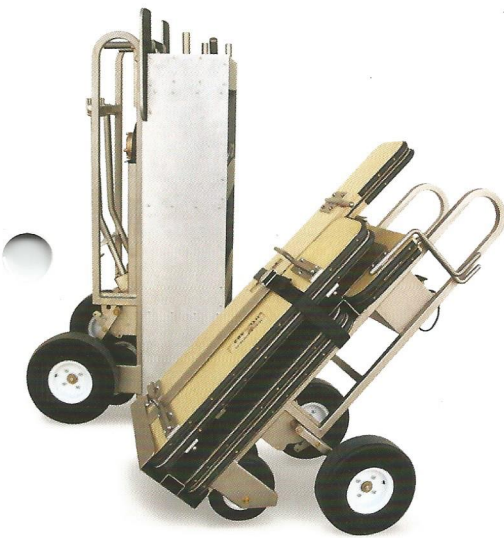

Engineered and handcrafted to be the most reliable camera dolly available, the Model 10 has the lowest maintenance of any hydraulic lift beam camera dolly. Grips and rental houses appreciate its outstanding dependability and ease of use... just ask them.


STEERING MODES

REAR (CONVENTIONAL):
Front wheels are locked, rear wheels can rotate 360°.


CRAB: Front and rear wheels can rotate in unison 360°.

ROUND: Front and rear wheels rotate independently with mechanical compensation to allow variable radius turns, even down to 0 radius.


WIDE: Front and rear wheels can rotate 180° in any steering mode, providing a wider wheel track for greater stability.

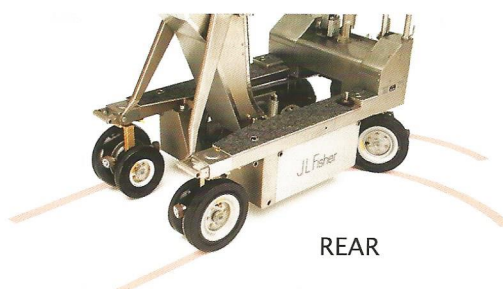


REAR

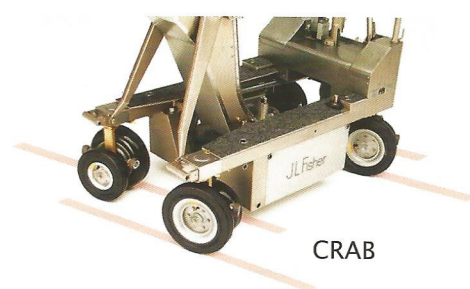

CRAB

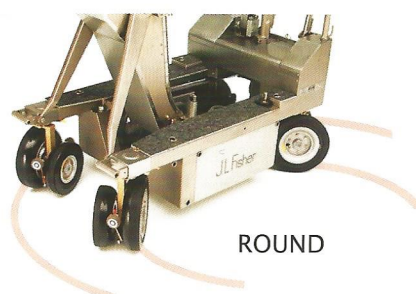

ROUND

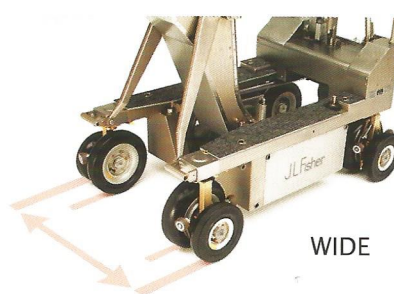

WIDE

ACCEPTS 90 TO 240 VOLTS AC OR DC
TO CHARGE THE HYDRAULIC LIFT SYSTEM
IN AS LITTLE AS THREE MINUTES

REMOVABLE PUSH POSTS

UTILITY HOOKS

SINGLE LEVER
POSITIVE LOCKING
BRAKE SYSTEM

SELF-CONTAINED
TRACK GUIDE SYSTEM

4 WAY
LEVEL HEAD

CABLE CLIPS ON BEAM

8 SEAT MOUNT LOCATIONS

SLIDING, CLOTH COVERED
CUSHIONED SEATS WITH
ADJUSTABLE HEIGHT

CARPETED
STANDING AREAS


BATTERY BOX



PUSH POSTS DOUBLE AS
REAR CARRY HANDLES





POSITIVE LOCKING BRAKES

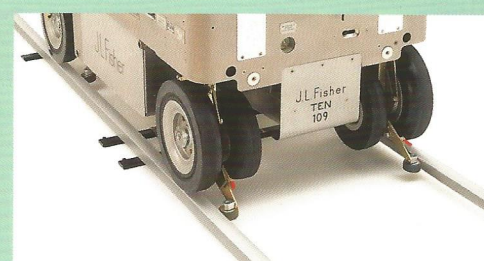

BUILT-IN TRACK GUIDES
(Square Track Only)

The Standard Rental Package includes these items:

- 1 SLT 4-way Level Head
- 1 HS Hand Screw (for SLT)
- 1 ST Small Seat
- 1 S Large Seat
- 2 PP Push Posts
- 2 LT Low Side Boards
- 2 F Front Boards
- 1 HTL High Side Board (Left)
- 1 HTR High Side Board (Right)
- 2 CH Carry Handles
- 1 PC Power Cord
- 2 FPIN Front Pins
- 1 BPR Knee Bumper
- 2 AWR Allen Wrenches
- 4 TLW Pneumatic Tires (large)
- 4 TSW Pneumatic Tires (small)
- 1 PBX Battery Box

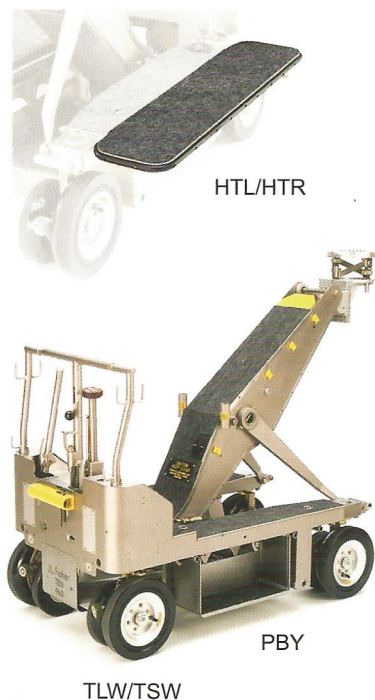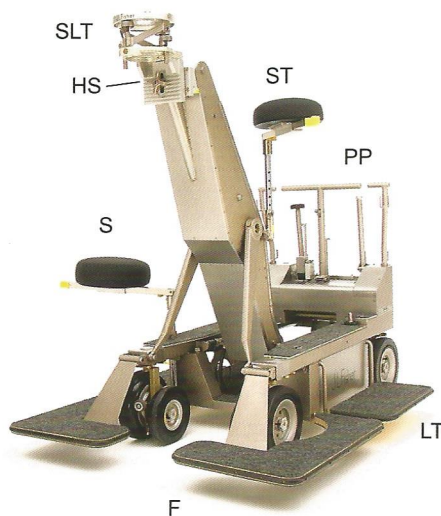


TLW/TSW

OPTIONAL ACCESSORIES



*Asterisk indicates items are included in the **FULL RENTAL PACKAGE**

Dolly Boards & Platforms

- BST* Beam Step Standing Platform
- DTL* Diving Board, Left
- DTR* Diving Board, Right
- SFB Short Front Board
- SNFB Short Narrow Front Board
- FBB* Front Board Bridge
- FP Front Porch
- LFB Low Front Board



BST*

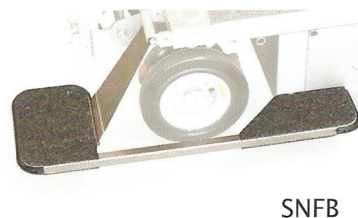

SFB

SNFB



FP



LFB



FBB*

MORE OPTIONAL ACCESSORIES

*Asterisk indicates items are included in the **FULL RENTAL PACKAGE**


Risers

R3	Camera Riser, 3" (7.6cm)
R6*	Camera Riser, 6" (15.2cm)
R12*	Camera Riser, 12" (30.5cm)
R6BA	Camera Riser w/ 75mm Ball Adapter, 6" (15.2cm)
R6BB	Camera Riser w/ 100mm Ball Adapter, 6" (15.2cm)
R6BC	Camera Riser w/ 150mm Ball Adapter, 6" (15.2cm)
R12BA	Camera Riser w/ 75mm Ball Adapter, 12" (30.5cm)
R12BB	Camera Riser w/ 100mm Ball Adapter, 12" (30.5cm)
R12BC	Camera Riser w/ 150mm Ball Adapter, 12" (30.5cm)
RJ6	Heavy Duty Camera Riser, 6" (15.2cm)
RJ12	Heavy Duty Camera Riser, 12" (30.5cm)
RJ18	Heavy Duty Camera Riser, 18" (45.7cm)
RJ24	Heavy Duty Camera Riser, 24" (61cm)
RJ36	Heavy Duty Camera Riser, 36" (91.4cm)




Angle Plate

AP*	90-Degree Camera Angle Plate
-----	------------------------------



Offsets

U*	Camera Offset, 10" (25.4cm)
TH*	Camera Offset, 24" (61cm)
RO*	Rotating Offset
ROB	Rotating Offset w/ Ball Adapter, 150mm
ROL	Rotating Offset, Low
ROHL	Rotating Offset, High/Low
ROX	Rotating Offset, Long
ROP	Rotating Offset, Pivot



Adapters

75A	75mm Ball Adapter
100A	100mm Ball Adapter
150A	150mm Ball Adapter
UA	Universal Adapter
HBA	Half-Ball Adapter
ESLT	Euro Boss Adapter
MEA	Mitchell Euro Adapter
WAT	Waffle Adapter



LHT*




Low Level Head

LHT*	4-way Low Level Head
------	----------------------

Seat & Seat Accessories

RS	Rotating Seat
SOH*	Seat Offset High
SOL	Seat Offset Low (Includes Seat)
SOS*	Seat Offset Straight
SSOS	Seat Offset Short
SR6*	Seat Riser Adjustable
BR/MLA	Seat w/Backrest & Adapter (for use w/SLT only)



SOH*



SOL

SOS*



SSOS

SR6*




BR/MLA

MORE OPTIONAL ACCESSORIES

Crossarms

CRA1	Crossarm, 11.5" (29cm) to 19" (48cm) Reach
CRA2	Crossarm, 15" (38cm) to 24" (61cm) Reach
CRA3	Crossarm, 18" (46cm) to 29" (74cm) Reach
CRA4	Crossarm, 23" (58cm) to 36" (91cm) Reach
CRA6	Crossarm, 31" (79cm) to 53" (135cm) Reach
CRA8	Crossarm, 40" (102cm) to 68" (173cm) Reach
CRA12	Crossarm, 54" (137cm) to 100" (254cm) Reach

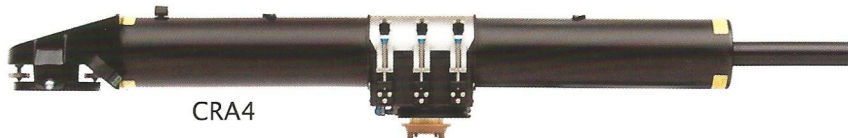


CRA4

Please refer to the Crossarm Brochure or our web site, www.jlfisher.com, for full specifications and options available

Jib Arms

JIB20	Model 20 Jib Arm, 51.5" (131cm) Reach
JIB21	Model 21 Jib Arm, 68.5" (174cm) Reach
JIB22	Model 22 Jib Arm, 99.5" (253cm) Reach
JIB23	Model 23 Sectional Jib Arm, 21' (6.4m) Reach

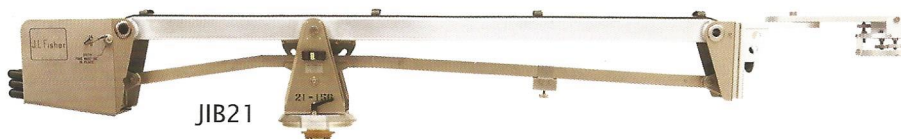

JIB21



Please refer to the Jib Arm Brochure or our web site, www.jlfisher.com, for full specifications and options available

Utility Cart & Weight Carts



JIB23 - SEVEN SIZES ALL IN ONE BOX

Utility Cart rear view showing section storage

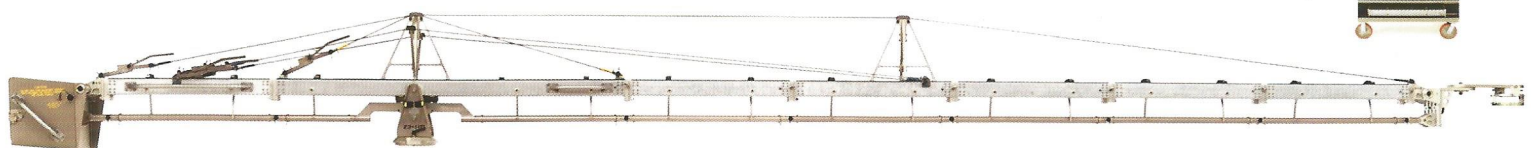

Fluid Heads


WS2	Weaver/Steadman Fluid Head, 2 Axis
WS3	Weaver/Steadman Fluid Head, 3 Axis
V	Vector 700 Fluid Head, 2 Axis




WS2



WS3



V

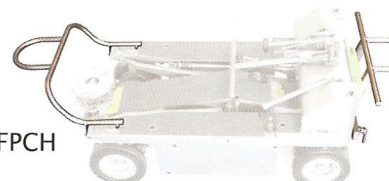


FPCH


Other Accessories

AC*	Accessory Carts (pair)
BAZ	Bazooka (Pneumatic or Sectional)
CM	Center Mount with RJ12 Riser
CB	Cue Board
FPCH	Four Person Carry Handles
HH	High Hat
LA	Lamp Adapter
MRD	Monitor Rack
MLA	Mitchell Lamp Adapter, Junior 1 1/8 in. (MLA)
PB	Push Bar
SCO	Scooter Board
UDJ	Dolly Jack (uses Push Post for handle)
UT	Utility Tray


AC* (pair)



BAZ



CM



CB



UDJ

HH



LA



MRD



MLA




PB



SCO



UT




Wheels & Ice Skates

SHW	Shaved Wheel
SK	Ice Skates
TTW	Round Track Wheels
SCWT	Soft Compound Wheels
SWT	Soft Wheels
SBWS	Skateboard Wheels
DSBC	Dexter Skateboard Wheels




SHW




SK




TTW



SCWT



SWT



SBWS / DSBC

Patents Pending

All J.L. Fisher track is on 24.5" (62cm) center




Track & Track Accessories

TR2	Round Straight Track, 2' (.61m)
TR3	Round Straight Track, 3' (.91m)
TR4	Round Straight Track, 4' (1.2m)
TR6	Round Straight Track, 6' (1.8m)
TR	Round Straight Track, 8' (2.4m)
TR10	Round Straight Track, 10' (3m)
CR10	Round Curved Track, 10' (3m) Dia.
CR15	Round Curved Track, 15' (4.6m) Dia.
CR	Round Curved Track, 20' (6.1m) Dia.
CR25	Round Curved Track, 25' (7.6m) Dia.
CR30	Round Curved Track, 30' (9.1m) Dia.
CR50	Round Curved Track, 50' (15.2m) Dia.
CR70	Round Curved Track, 70' (21.3m) Dia.
RMPR	Track Ramp For Round Track
WED	Track Wedges
TB	Track Buckle

Square tube dolly track, not shown here, is available in similar sizes and diameters as the round tube track. Please call J.L. Fisher for availability.



Round Tube Track
1.5" (3.8cm) Diameter

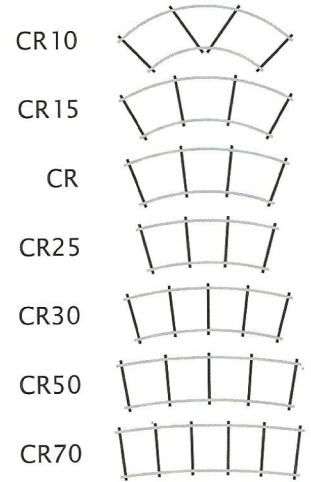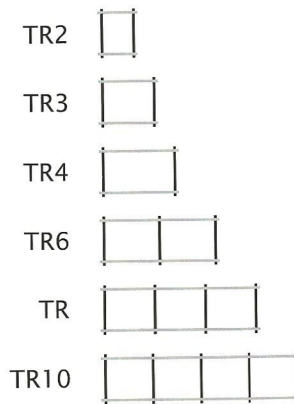


3 TRACK OPTIONS:

- BUILT-IN TRACK GUIDES
- TRACK WHEELS (TTW)
- NEW - FULLY ARTICULATED SKATEBOARD WHEELS




Model 10 Dolly shown with High Side Boards (HTL/HTR), Rotating Seat (RS), Seat Offset High (SOH) and Track Wheels (TTW) on Round Curved Track (CR) and Round Straight Track (TR4)

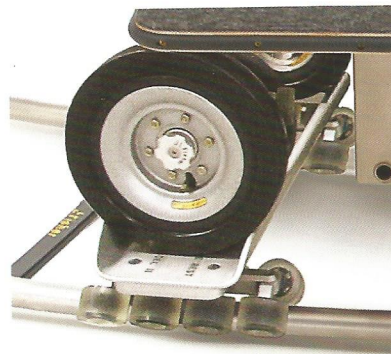

Patents Pending

EACH SET OF 2 WHEELS (TRUCK) CAN SWIVEL INDEPENDENTLY

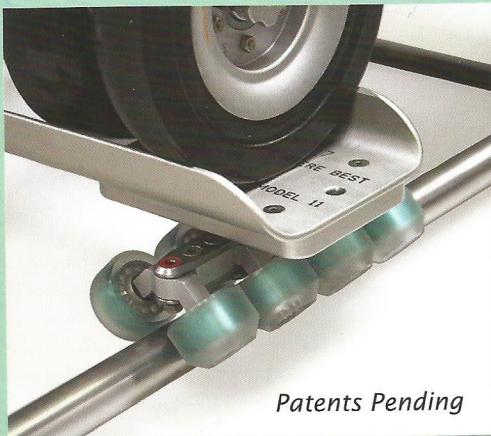

Patents Pending

SKATEBOARD WHEELS (SBWS)



TRACK WHEELS (TTW) ON ROUND STRAIGHT TRACK (TR)



BUILT-IN TRACK GUIDES ON SQUARE TRACK



MITCHELL MOUNT LEVELING HEAD WITH 4 WAY ADJUSTMENT AND 360° ADJUSTABLE DIAMOND PLATE

SEVEN LIFTS PER SYSTEM CHARGE

SELF-BLEEDING HYDRAULIC SYSTEM

500 lb. (227kg) LIFT BEAM CAPACITY

LIFT BEAM POSITION (CUE) INDICATOR

SELF-DAMPENING LIFT BEAM SYSTEM


PNEUMATIC TIRES

LEVELING HEAD
CAN BE REVERSED

SELF CENTERING HYDRAULIC
LIFT BEAM CONTROL KNOB
WITH SAFETY LOCK.

OPTIONAL UP/DOWN LEVEL
WITH SAFETY LOCK


HYDRAULIC HAND PUMP
FOR LOCATION WORK

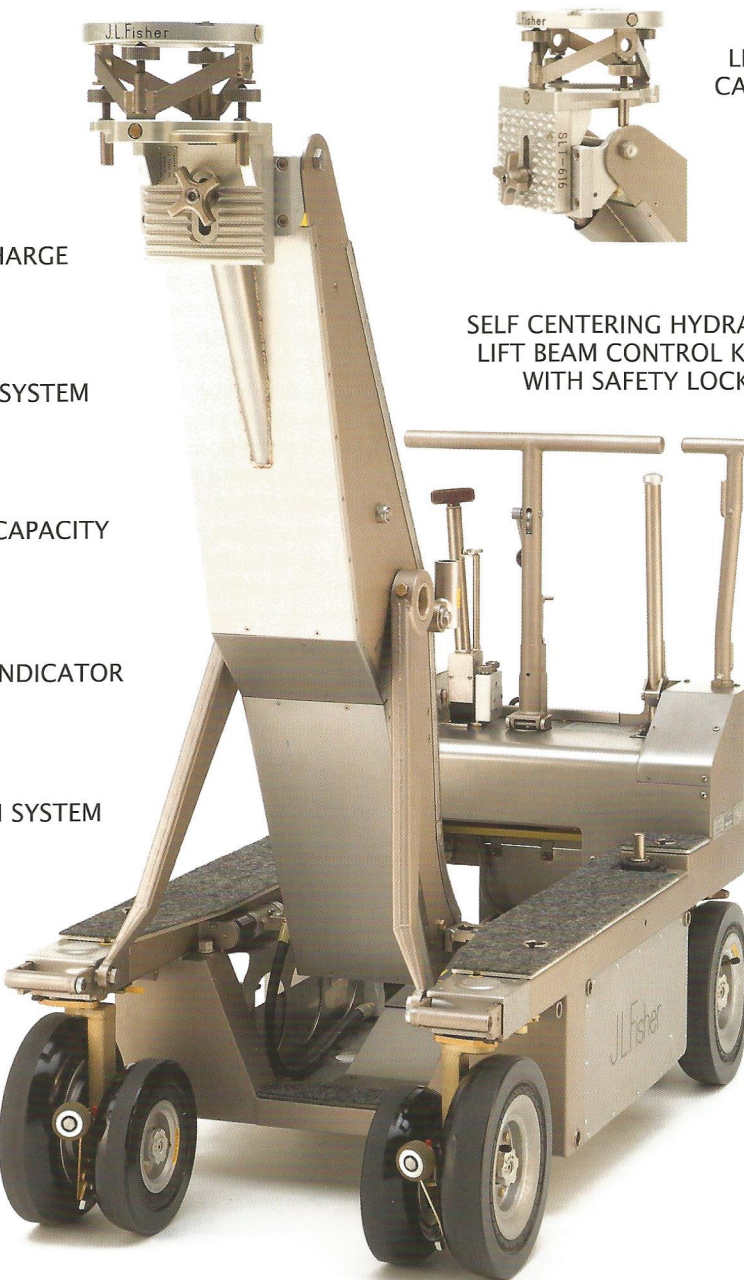

The Model 10 Dolly has a maximum load capacity of 1200 lbs. (544 kg)



LIFT BEAM (CUE) INDICATOR




Power Requirements:
90 TO 240 VOLTS AC OR DC




NEW Fully articulated skateboard wheels
(Patents Pending)

Maximum Lift Beam Elevation	63 in. (160 cm)
Minimum Elevation (standard head)	13.75 in. (35 cm)
Minimum Elevation (low level head)	3.325 in. (9 cm)
Vertical Beam Travel	47 in. (119 cm)
Lift Beam Capacity	500 pounds (227 kg)
Lifts per System Charge	7
Length	55.25 in. (140 cm)
Width (wheels in)	26.625 in. (68 cm)
Width (wheels out)	32 in. (81 cm)
Height (operating)	38.5 in. (98 cm)
Height (folded)	25 in. (64 cm)
Height (center mount, before riser)	38.75 in. (98 cm)
Minimum Turn Radius (round steering)	22 in. (56 cm)
Minimum Turn Radius (conventional steering)	44 in. (112 cm)
Maximum Dolly Load Capacity	1200 pounds (544 kg)
Battery Box (PBY) inside dimensions	16 in. (40.6 cm) W x 7 in. (17.8 cm) H x 6 in. (15.2 cm) D
Carrying Weight	435 pounds (197 kg)
Crated Size	59 in. (150 cm) L x 31 in. (79 cm) W x 34 in. (86 cm) H
Crated Weight	928 pounds (421 kg) (standard package)


DIMENSIONS

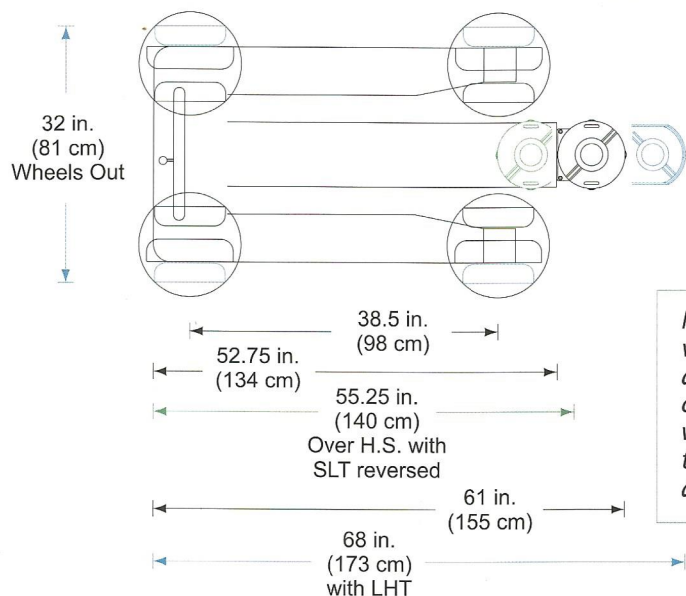

Note: Due to variables such as adjustments and choice of risers, wheels, etc., these dimensions are approximate.

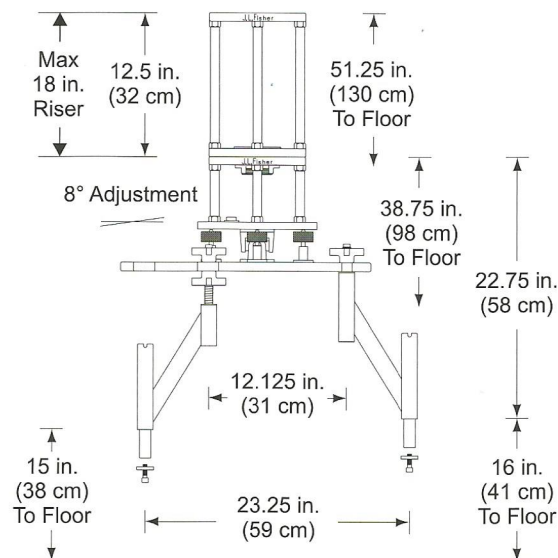


MODEL 10 DOLLY

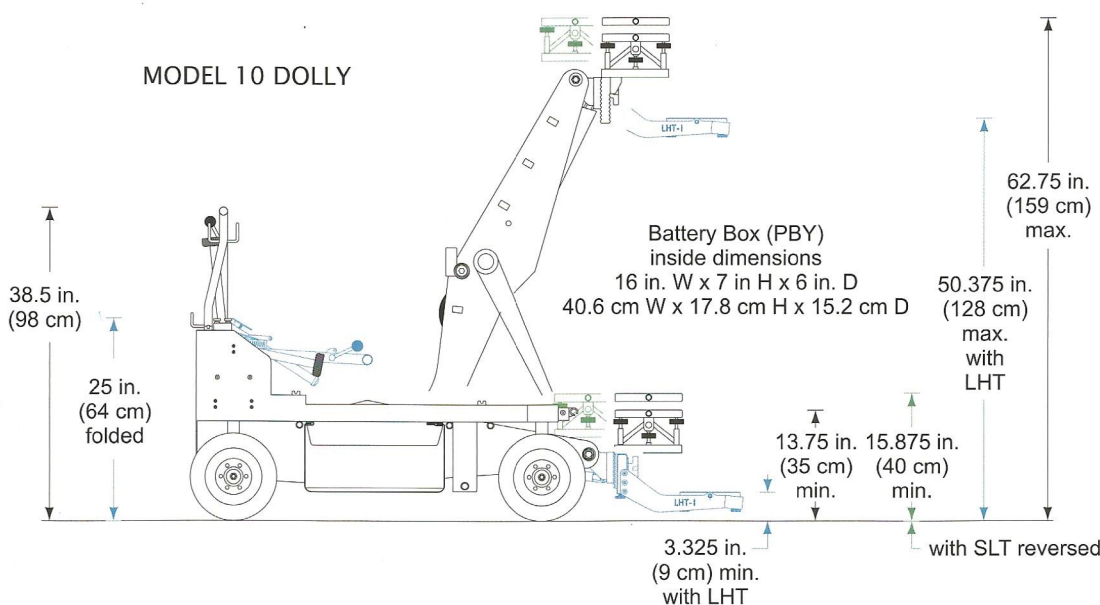

CENTER MOUNT (CM)

The Center Mount (CM), supports jib arms, lightweight camera booms and counterbalanced camera cranes. The Center Mount has thumbscrews for four-way leveling adjustment and a leveling indicator. Easily installed, the Center Mount has a standard Mitchell mount and comes with a heavy duty 12-inch Riser (RJ12).

The maximum gross load capacity is 1200 pounds (544 kg). Center Mount is not for supporting personnel or personnel carrying cranes.

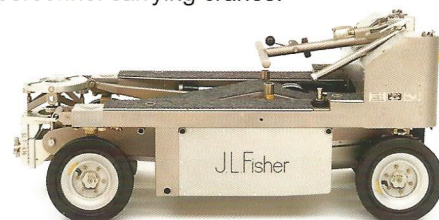

FOLDING CONTROLS

J.L. FISHER PRODUCTS ARE PROUDLY MADE IN BURBANK, CALIFORNIA U.S.A.

J.L. Fisher, Inc. Motion Picture & Television Equipment
1000 W. Isabel Street, Burbank, CA 91506 U.S.A.
Tel: (818) 846-8366 / Fax: (818) 846-8699
Web: www.jlfisher.com e-mail: info@jlfisher.com

J.L. Fisher, GmbH Emil-Hoffmann-Str. 55-59 50996 Köln, Germany
Tel: +49 2236 3922 0 Fax: +49 2236 3922 12
Web: www.jlfisher.de e-mail: info@jlfisher.de